

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/327778094>

Detection of Divaška Jama corridors behind (to the SW) Trhlovca cave using low frequency high power ground penetrating radar

Article in *Acta Carsologica / Karsoslovni Zbornik* · September 2018

DOI: 10.3986/ac.v47i2-3.5187

CITATION

1

READS

197

5 authors, including:



Pavel Kalenda

CoalExp

135 PUBLICATIONS 468 CITATIONS

[SEE PROFILE](#)



Rudolf Tengler

14 PUBLICATIONS 2 CITATIONS

[SEE PROFILE](#)



Stanka Sebel

Research Centre of the Slovenian Academy of Sciences and Arts

113 PUBLICATIONS 594 CITATIONS

[SEE PROFILE](#)



Matej Blatnik

Research Centre of the Slovenian Academy of Sciences and Arts

15 PUBLICATIONS 7 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



PRESTo@CE3RN [View project](#)



Karst research [View project](#)

DETECTION OF DIVAŠKA JAMA CORRIDORS BEHIND (TO THE SW) TRHLOVCA CAVE USING LOW FREQUENCY HIGH POWER GROUND PENETRATING RADAR

DOLOČITEV ROVOV DIVAŠKE JAME V JZ SMERI ZA TRHLOVCO Z UPORABO ZELO MOČNEGA NIZKOFREKVENČNEGA GEORADARJA

Pavel KALENDA^{1*}, Rudolf TENGLER², Stanka ŠEBELA³,
Matej BLATNIK³ & Andrej GOSAR⁴

Abstract

UDC 551.442:621.396.96(497.472)

Pavel Kalenda, Rudolf Tengler, Stanka Šebela, Matej Blatnik & Andrej Gosar: Detection of Divaška Jama corridors behind (to the SW) Trhlovca cave using low frequency high power ground penetrating radar

Ground penetrating radar (GPR) named "Roteg" was used to detect known and unknown passages of Divaška Jama and Trhlovca caves in SW Slovenia. "Roteg's" main characteristics are an extraordinary high power output (20 MW) and high voltage on antennas (up to 20 kV), which allows penetration more than ten times deeper than common GPRs. During the measurement we used 3-m long antennas (50 MHz) with a central frequency of 50 MHz and we clearly detected the reflections from the depth of 200 m after data processing. During field survey 22 profiles were completed with a total length of 4487.97 m. Pretnerjeva and Žibernova Dvorana chambers in Divaška Jama were well visible on radarograms. New big cavities, which were detected below profiles P18, P21 and P22, are almost all at the same level of 350 – 400 m a.s.l. There is another group of cavities at a level of 420 – 450 m a.s.l., which corresponds to Trhlovca. Both cave groups are separated by the gap which extends in the vertical direction, and probably presents a tectonic zone, which is as well visible on the radarograms. By the use of "Roteg" at the karst surface we were able to detect known caves, new - unknown caves and tectonic zones up to 200 m below the surface.

Key words: ground penetrating radar, caves, karst, Divaška Jama, Trhlovca, Slovenia.

Izveček

UDK 551.442:621.396.96(497.472)

Pavel Kalenda, Rudolf Tengler, Stanka Šebela, Matej Blatnik & Andrej Gosar: Določitev rogov Divaške jame v JZ smeri za Trhlovco z uporabo zelo močnega nizkofrekvenčnega georadarja

Nizkofrekvenčni georadar (GPR), imenovan »Roteg«, smo uporabili pri zaznavi znanih in neznanih rogov Divaške jame in Trhlovce v JZ Sloveniji. »Rotegove« glavne značilnosti so izjemna moč (20 MW) in visoka napetost do 20 kV na antenah, kar omogoča penetracijo, ki je več kot desetkrat globlja, kot jo dosežejo običajni georadarji. Med meritvami smo uporabili 3 m dolgi anteni (50 MHz) s središčno frekvenco 50 MHz. Tako smo po obdelavi podatkov jasno zaznali odboje iz globine 200 m. Med terenskimi meritvami smo izmerili 22 profilov s skupno dolžino 4490 m. Pretnerjeva in Žibernova dvorana v Divaški jami sta bili dobro vidni na georadarskih profilih. Nove velike jame, ki smo jih zaznali pod profili P18, P21 in P22, so skoraj vse na istem nivoju, 350–400 m nad morjem. Druga skupina jam na nadmorski višini 420–450 m ustreza Trhlovci. Obe skupini jam sta ločeni z vrzeljo v navpični smeri, ki je verjetno tektonska cona in je dobro vidna na georadarskih profilih. Z uporabo »Rotega« na kraškem površju smo določili znane jame, nove neznane jame in tektonske cone do globine 200 m pod površjem.

Ključne besede: georadar (GPR), jame, kras, Divaška jama, Trhlovca, Slovenija.

¹ CoalExp, 73904 Pražmo 129, Czech Republic, e-mail: pkalenda@volny.cz

² Ing. Rudolf Tengler – RTG, Českobratrská 357, 276 01 Mělník, Czech Republic, e-mail: rtg@rtg-tengler.cz

³ ZRC SAZU Karst Research Institute, Titov trg 2, 6230 Postojna, Slovenia, e-mail: sebela@zrc-sazu.si, mblatnik@zrc-sazu.si

⁴ University of Ljubljana, Faculty of Natural Sciences and Engineering and Slovenian Environment Agency, Seismology and Geology Office, Vojkova 1b, 1000 Ljubljana, Slovenia, e-mail: Andrej.Gosar@gov.si

* Corresponding author

INTRODUCTION

The detection of cavities is one of primary goals of GPR method in karst regions (Gosar 2012). Unfortunately, most existing ground penetrating radars (GPR) are unable to detect cavities deeper than 30 m below the ground, even when low frequencies and large antennas are used (Bláha *et al.* 1999; Hladík & Hruška 1999; Chamberlain *et al.* 2000; Knez & Slabe 2005; Pavlič & Praznik 2011; Gosar 2012).

In 2014 a new kind of GPR named “Roteg” was developed (RTG-Tengler 2013). Its main characteristic is an extraordinary high power output (20 MW) and high voltage on antennas (up to 20 kV). This is more than two orders larger than in the case of usual GPRs. Such big power allows penetrating more than ten times greater depths than common GPRs.

In 2015 – 2017 we tested “Roteg” GPR at several places (in brackets are positively verified penetrating depths): Pytlíková Cave (20 m) (Kalenda *et al.* 2016), quarry Malá Dohoda (20 m) (Kalenda *et al.* 2016), below the quarry Na Bradinách (20 m) (Kalenda *et al.* 2016), Holštejská Cave (40 m) (Kalenda & Tengler

2016), Spodní Suchdolská Cave (40 m) (Kalenda *et al.* 2016), Lopač Cave (20 – 60 m) (Tengler *et al.* 2016), cave No.561A in the quarry Velká Dohoda (40 m with 1-m antennas - 150 MHz) (Kalenda *et al.* 2016), cave Amatérská Jeskyně (90 – 110 m) (Tengler *et al.* 2016), Pekárna Cave (140 m) (Kalenda *et al.* 2017a). After such positive results, we tested the most powerful version in Slovenia above cave system Postojnska – Planinska Jama. We clearly detected caves Jama Na Poti (40 m) (Kalenda *et al.* 2017b), Črna Jama and Pivka Jama (60 – 70 m) (Kalenda *et al.* 2018), Postojnska Jama (80 – 150 m) and Planinska Jama (180 m) (Kalenda *et al.* 2018).

Therefore, the detection of Divaška Jama corridors at depths of 30 – 100 m should not be a problem for “Roteg” GPR. In this study we first repeated part of the measurements performed by Gosar (2012) above Divaška Jama using 50 MHz antenna as a test. Next we prolonged the measurements behind (to the SW) Trhlovca cave to detect undiscovered parts of Divaška Jama and a possible new cave too.

THE GPR METHOD AND LOW-FREQUENCY HIGH-POWER GPR SYSTEM „ROTEG“

GPR produces the short electromagnetic pulses, which are transmitted to the ground by transmitting antenna. The second antenna of the GPR measures the travel time and amplitude of the reflected electromagnetic waves, which are reflected on inhomogeneities (from the viewpoint of electrical conductivity). The delay of the receiving signal depends on the depth of inhomogeneity and velocity of electromagnetic signals in the rock. The **velocity** of EM signal in rock-mass depends on its permittivity (ϵ) according to the equation (Allred *et al.* 2008):

$$v_m = \frac{v_0}{\sqrt{\frac{\epsilon_m}{\epsilon_0}}} \quad (1)$$

where:

v_m – velocity of the wave propagation through any material

v_0 – speed of light in air

ϵ_m – permittivity of the material

ϵ_0 – permittivity of free space or vacuum.

In our case we used the velocity for wet limestone 0.12 m/ns (Cassidy 2009).

The **penetration depth** is the crucial factor, which limits the applications of GPRs. For high-frequency GPRs, the relatively small penetration depth (only several meters) is due to high attenuation of the high-frequency signal. The penetration depth for low-frequency GPR (below 100 MHz) is limited to dozens of meters mostly by mineralized water, which converts the energy to the heat (Smith & Jol 1995; van der Kruk *et al.* 1999).

Preliminary test in Moravian Karst (Czech Republic) confirms that in suitable conditions (limestone covered by at least one meter thick soil), the penetration depth is larger than 100 m and in the case of high thickness of wet soil (several meters), the penetration depth decreased to ≈ 40 m (Tengler *et al.* 2016).

The new “Roteg” GPR, compared to the existing GPRs, is characterized by a much higher pulse power (up to 20 MW), higher voltage of antennas (5-20 kV), and in particular by the special design of the pulse generator, which bypasses frequently used semiconductor components MOS and LDMOS, and uses a spark gap instead. This spark gap (discharger) produces Dirac pulses up to 4 ns long by directly discharging capacitors

(RTG-Tengler 2013). The predominant frequencies are selected from the continuous spectrum by a special antenna, which is tuned to them. The 6-metre long antenna is tuned to the predominant frequency of 25 MHz, the 3-metre antenna is tuned to 50 MHz, and 1-metre antenna is tuned to 150 MHz. Under optimal conditions, when the soil and young sedimentary cover is not thicker than few metres, the reflections of the cave ceiling were clearly detectable using the 6-metre antennas at the depths of around 100 metres under the surface (Tengler *et al.* 2016).

We used 3-m antennas (50 MHz) and maximal power (20 MW) in the case of measurement above Divaška Jama and behind Trhlovca. We stacked approximately 10 pulses, with the frequency of pulse generation of 120 Hz at a propagation speed of approx. 3 km/h, into one sum with the step of 0.1 m. The accuracy of positioning of the measurement point by on-line GPS was approx. 1 m. The

length of records is 2,992 ns obtained with 10.801 samples at 0.277 ns. This corresponds to the converted depth of approx. 360 m at a wave velocity of 12 cm/ns. The sampling frequency was 3.6 GHz. The wave velocity of 12 cm/ns is a table value for typical limestone and it was verified by the curvature of hyperbolas on radarograms.

The REFLEXW program (Sandmeier Software) was used for the data processing. The data was processed using the following sequence:

The signal was amplified with depth, the signal was averaged in x and y axes using 20 samples (elimination of HF noise). Frequencies below 5 MHz and above 40 MHz were filtered to highlight large structures only and remove noise. The used 3-m antennas with 50 MHz central frequency are wide-band antennas with wide frequency band between 5 and 500 MHz. The received signal therefore must be processed in accordance with the purpose of the measurement.

RESULTS

TEST MEASUREMENT ABOVE KNOWN PARTS OF DIVAŠKA JAMA

We started the measurements above known corridors and chambers of Divaška Jama, where common GPR was not successful (Gosar 2012) (Fig. 1).

In Tab. 1 coordinates and lengths of all performed field GPR profiles are presented.

Profile P4_900 started at the main road Divača – Lokev, finished after 300 m at the start of profile P1. The record length was exceptionally set at 15,000 samples (900 m depth). The other profiles (Fig. 1 and 9) were set to the maximum of penetration depth of 360 m, because we were not looking for deeper caves in this area.

Profile P4_900 detected a relatively small cavity at the depth of 30 m at the beginning of the profile (until the position of 40 m) (Fig. 2 – A4). The second important structure is probably a corroded interlayer geological structure (bedding?) with several cavities, which starts at the profile position of 10 m at the depth of 65 m and finishes at the position of 120 m at the depth of 30 m (B4). One small cavity was created on the same structure at the position of 176 m at the depth of 17 m (C4). The third important structure is probably part of Divaška Jama at the position of 190 – 210 m and the depth of 60 m accompanied by another cavity 20 m below it (at the depth of 80 m) at the position 210 – 230 m.

Profile P1 started at the end of profile P4_900 and finished on the forest road. We detected an undiscovered

cave at the position between 45 – 65 m at the depth of 50 – 65 m (Fig. 3). It is probably an unknown part of Divaška Jama, which can continue to the north by a deeper corridor below the chamber Pretnerjeva Dvorana.

Profile P2 crossed Divaška Jama and finished at a bush (Fig. 1). The profile of ceiling of the chamber Pretnerjeva Dvorana in Divaška Jama is nicely seen between positions of 33 m and 64 m at the depth of 20 – 25 m (Fig. 4).

Two strong reflections are visible at the beginning of the cave at the position of 8 m and the depth of 45 m and at the end of the profile at the depth of 35 m. Both of them are cavities probably genetically connected with Divaška Jama.

The profile P5, which was planned to be parallel with the Divaška Jama main corridor (Fig. 1), did not show any important cave at the depth between 30 and 70 m (Fig. 5). The most important structure, which is only seen, is probably corroded interlayer geological structure with several cavities, which starts at the beginning of the profile at the depth of 100 m and finishes at the position of 50 m at the depth of 110 m.

Profile P6 started approximately 15 m east of the known end of Divaška Jama and finished behind Trhlovca.

Three important cavities were detected on this profile at the depth of Divaška Jama – at the position of 12 m at the depth of 35 m, at the position of 112 – 120 m at the

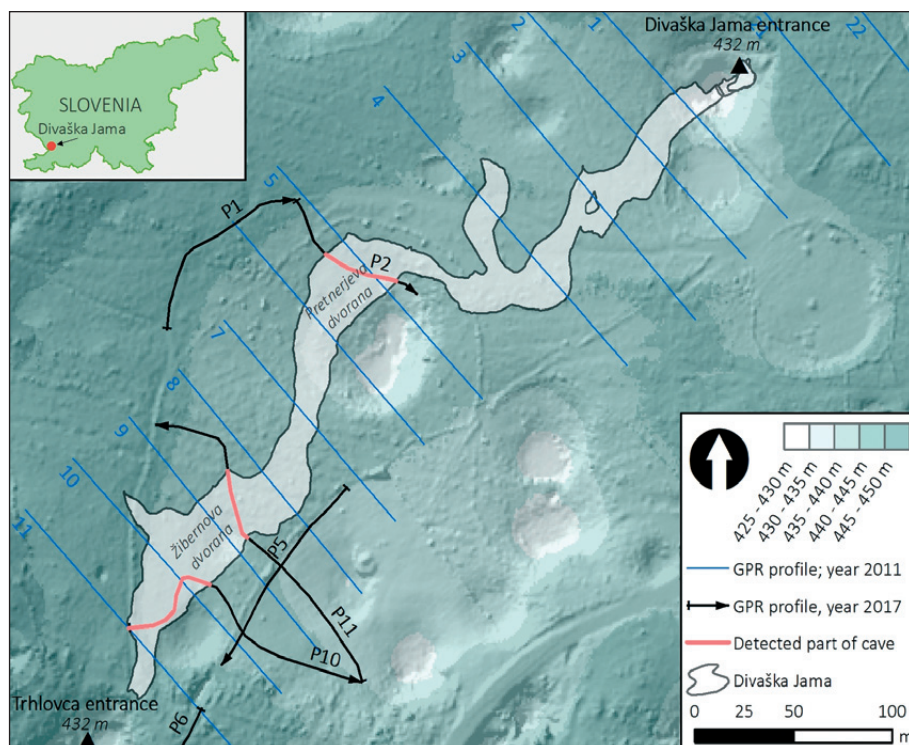


Fig. 1: GPR profiles measured above known part of the cave Divaška Jama. Blue lines – profiles of Gosar (2012), black curves – profiles of “Roteč” GPR 2017. Red – detected ceiling of the cave (Figs. 4, 7 and 8).

	start		end		length (m)
	lon (°)	lat (°)	lon (°)	lat (°)	
P4_900	13.948161	45.671864	13.947150	45.674182	301.70
P1	13.947155	45.674222	13.947923	45.674775	98.42
P2	13.947953	45.674795	13.948723	45.674348	87.94
(P4)	13.948326	45.674475	13.948342	45.673533	135.19
P5	13.948358	45.673511	13.947561	45.672711	116.15
P6	13.947455	45.672598	13.946964	45.671687	120.18
P7	13.946989	45.671637	13.948121	45.671841	106.38
P9	13.948114	45.671853	13.946941	45.672646	135.99
P10	13.946982	45.672929	13.948398	45.672746	144.45
P11	13.948408	45.672748	13.947005	45.673838	180.22
P12	13.948038	45.671676	13.944765	45.672574	307.65
P13	13.944760	45.672594	13.943373	45.673278	143.25
P14	13.943311	45.673282	13.942660	45.672965	64.77
P15	13.942606	45.672850	13.945195	45.671471	302.61
P16	13.945225	45.671464	13.948046	45.671279	256.77
P17	13.948078	45.671320	13.947827	45.671527	31.73
P18	13.946784	45.669352	13.943633	45.670736	295.66
P19	13.94359	45.670746	13.939193	45.672119	407.98
P21	13.939089	45.672107	13.935675	45.672882	304.22
P22	13.935571	45.672911	13.931988	45.672145	304.72
P23	13.937355	45.672918	13.937888	45.674506	268.06
P24	13.937879	45.674649	13.941950	45.674406	373.93

Tab. 1: Starts, ends and lengths of profiles according to integrated GPS.

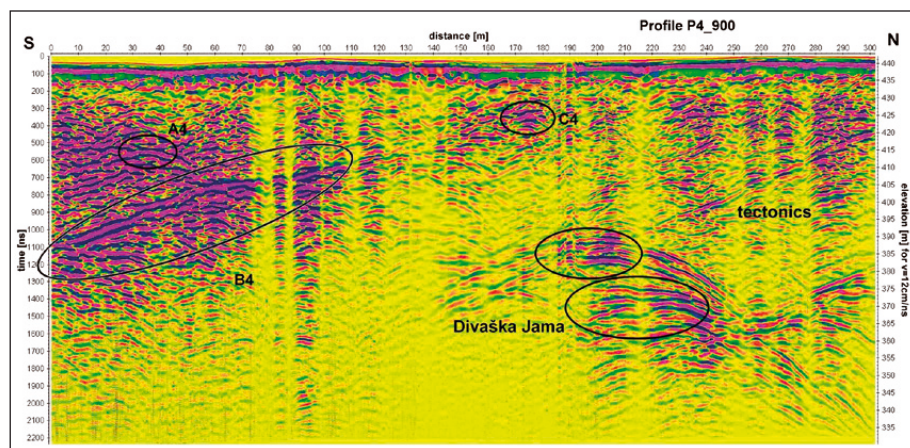


Fig. 2: GPR profile P4_900.

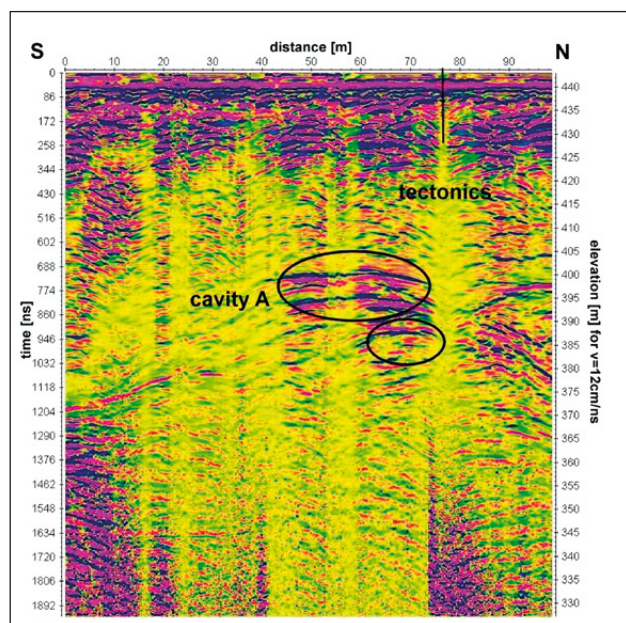


Fig. 3: GPR profile P1.

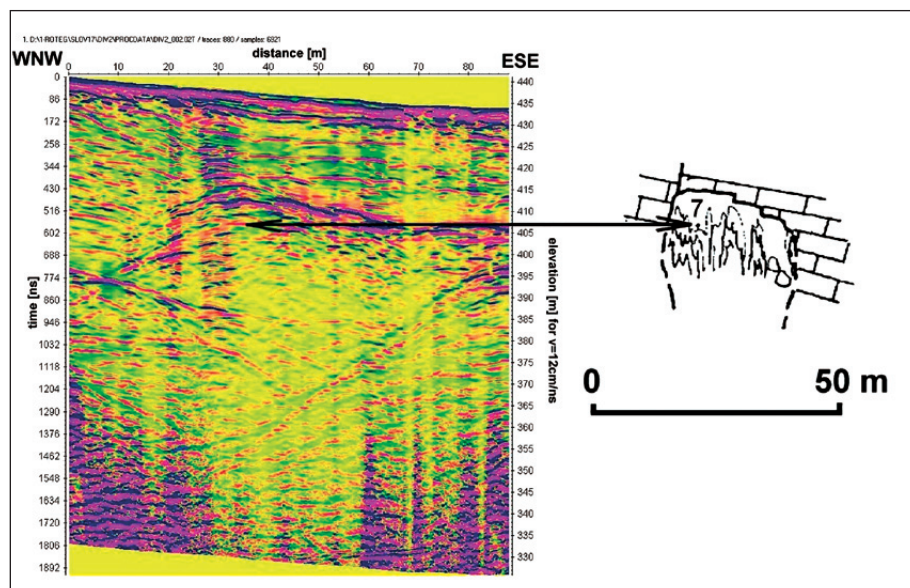


Fig. 4: GPR profile P2 and cross-section of Pretnerjeva Dvorana by Gospodarič (1985). The arrow marks the corresponding trigonometric point.

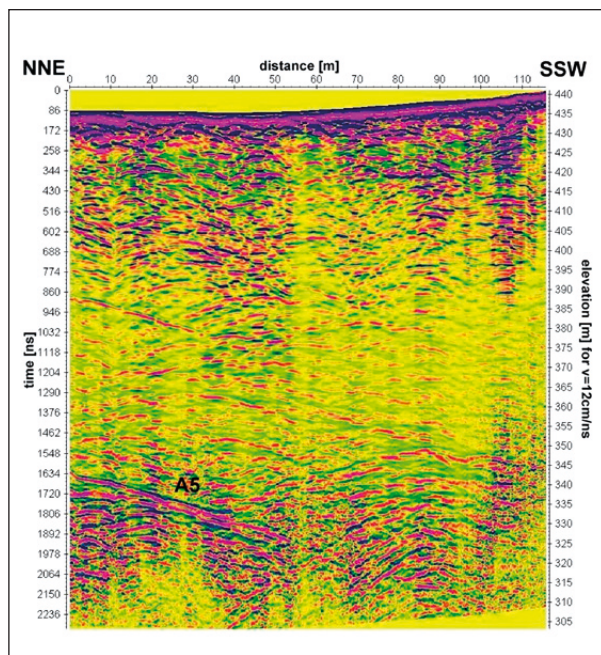


Fig. 5: GPR profile P5.

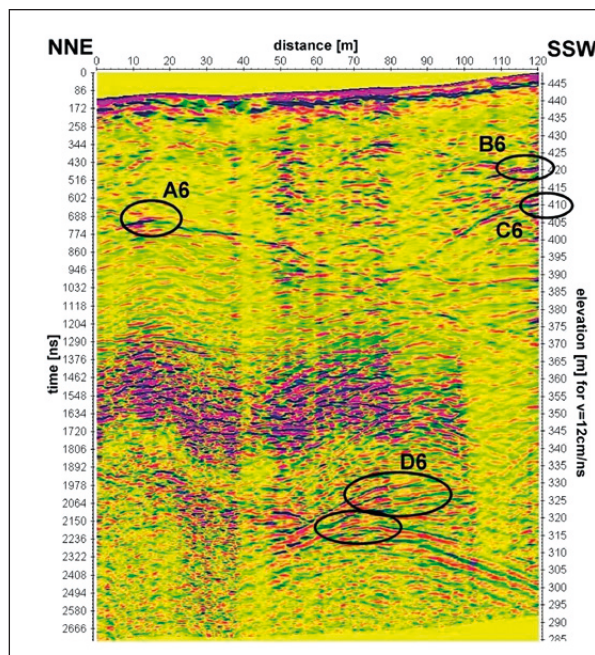


Fig. 6: GPR profile P6.

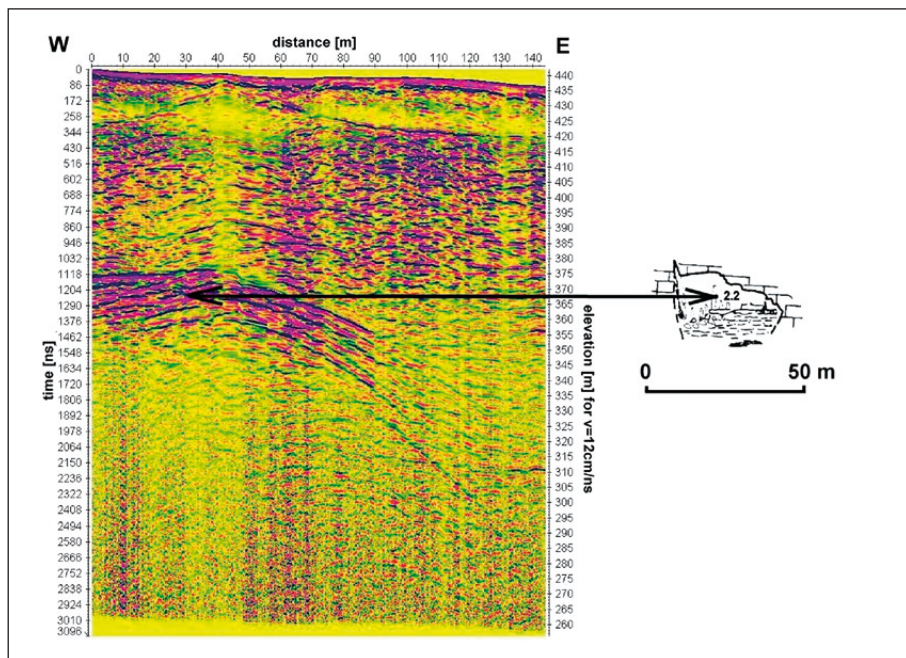


Fig. 7: GPR profile P10 and cross-section of Žibernova Dvorana by Gospodarič (1985). The arrow marks the corresponding trigonometric point.

depth of 26 m and at the end of the profile at the depth of 35 m (Fig. 6). Two other important cavities were found at a depth of 115 m and 125 m at positions between 65 and 90 m (Fig. 6). It should be the deeper cave level, which could be connected with Trhlovca, and was detected on profile P11 too.

The most important were two profiles P10 and P11, which were measured above the chamber Žibernova

Dvorana (Fig. 1). The big cavity at the depth of 65 m was clearly visible on the radarogram on the profile P10 with the ceiling from the beginning of the profile and end at the position of 50 m (Fig. 7). This is in perfect agreement with the diameter of this chamber and its depth (Fig. 3 in Gosar 2012). Above Žibernova Dvorana there are only two smaller cavities at depths of 35 m and 45 m below the surface at the position of 45 – 50 m.

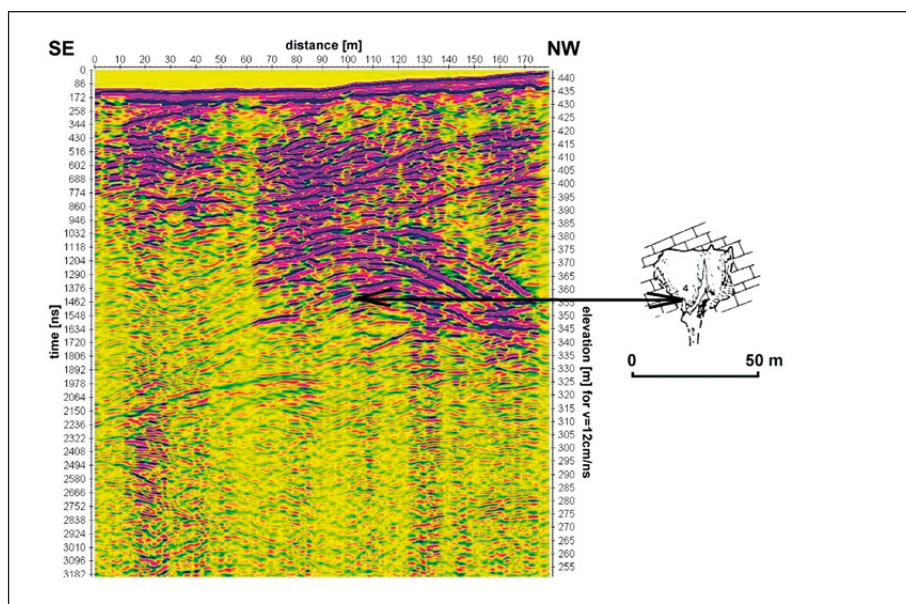


Fig. 8: GPR profile P11 and cross-section of Žibernova Dvorana by Gospodarič (1985). The arrow marks the corresponding trigonometric point.

A similar cavity as on profile P10 can be seen on profile P11 (Fig. 8). The ceiling of chamber Žibernova Dvorana starts at the position of 85 m and its top is at the position of 126 m at the depth of 65 m. This is in good agreement with the cross-section of Žibernova Dvorana on the cave map. The bottom of the Žibernova Dvorana

can be at the depth of 85 m, i.e., 355 m above the sea. Another significant reflection can be seen at the position of 80 m and the depth of 110 m. It looks like a corridor of deeper cave level, because almost at the same position it was detected on other profiles, especially south and west of cave Trhlovca.

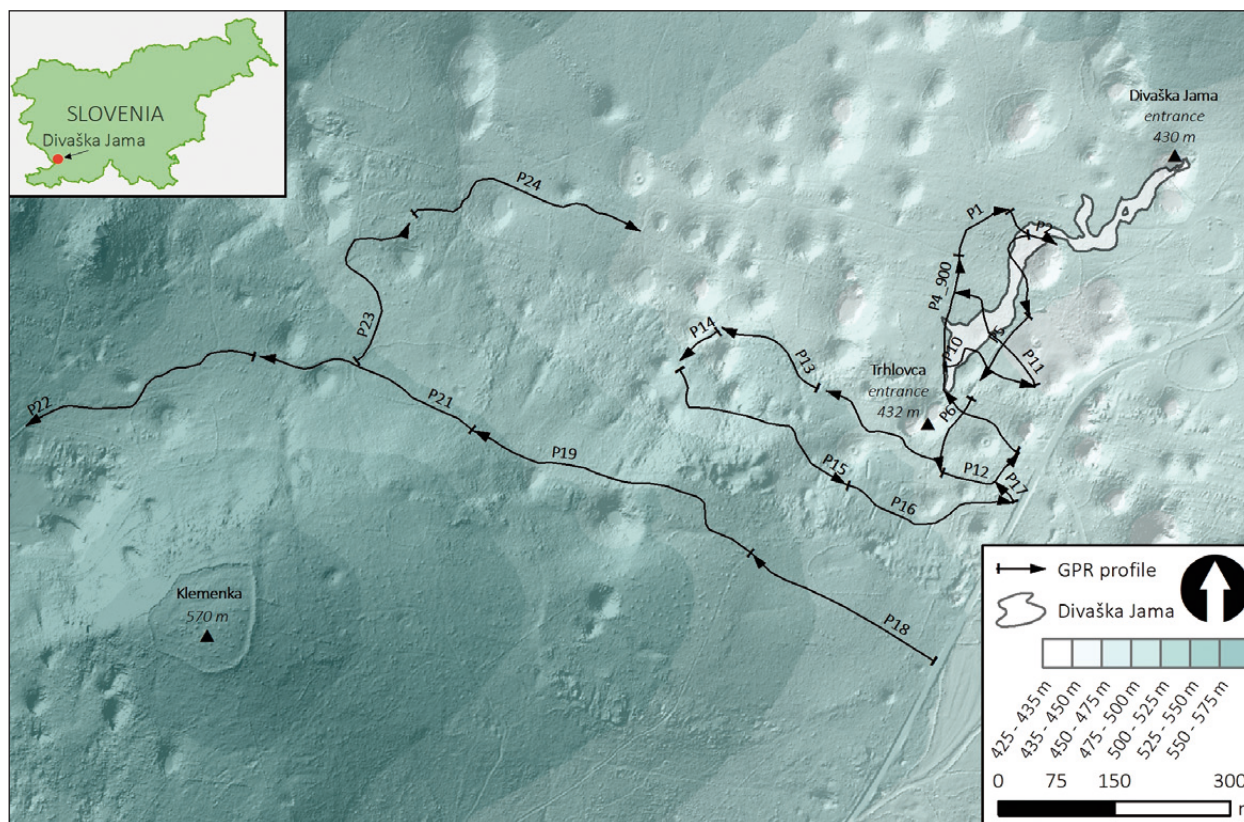


Fig. 9: Map of GPR profiles measured above Divaška Jama and in its surrounding.

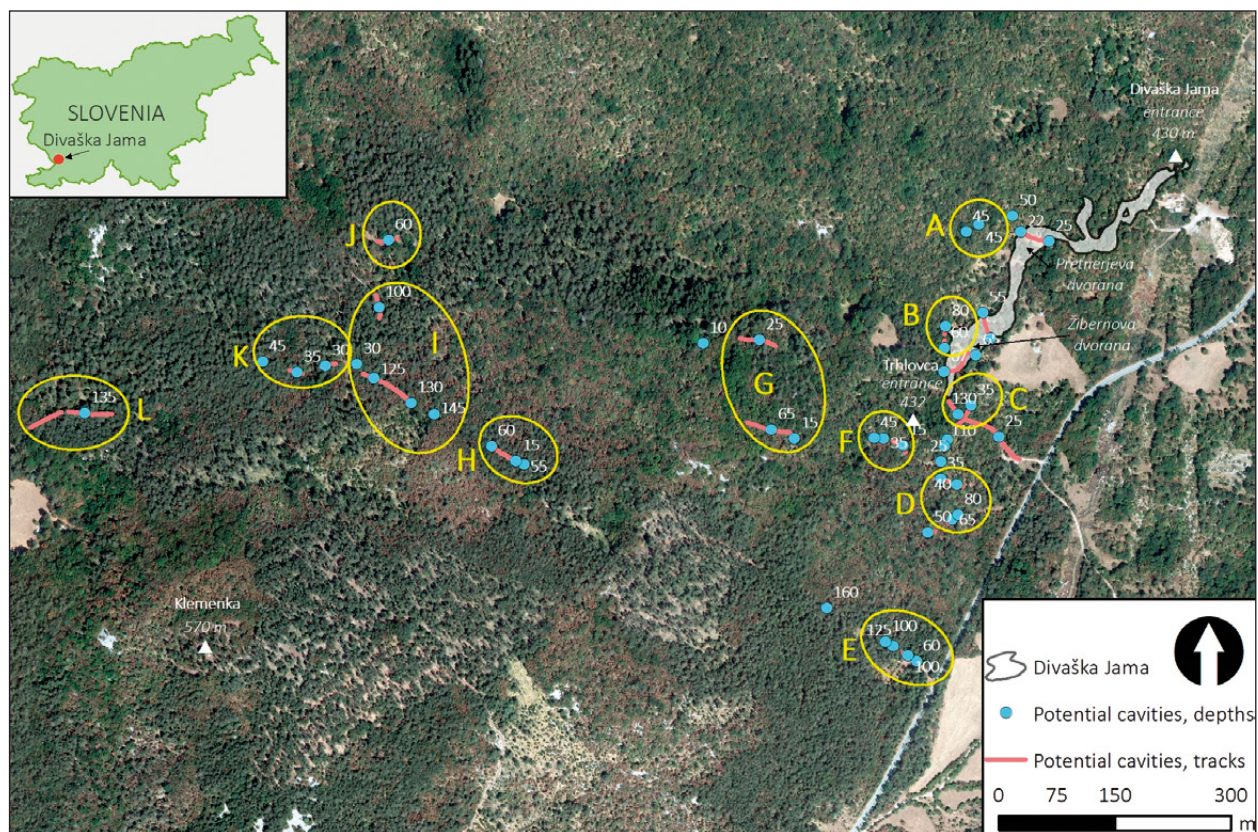


Fig. 10: Interpreted unknown large cavities detected by GPR. Numbers mark the depth; letters mark the cavities - see text and Tab. 2.

Cavity	Depth	Lon	Depth
A	45.674613°	13.947492°	45 m
B	45.673198°	13.946906°	60 m
C	45.671975°	13.947049°	110 m
D	45.671108°	13.947064°	65 m
E	45.669801°	13.945870°	125 m
F	45.672064°	13.945886°	35 m
G	45.672121°	13.944032°	65 m
H	45.671800°	13.939920°	60 m
I	45.672735°	13.937636°	125 m
J	45.674315°	13.937689°	60 m
K	45.672760°	13.936240°	35 m
L	45.672274°	13.932838°	135 m

Tab. 2: The interpreted positions of centres of found cavities on GPR profiles measured behind cave Trhlovca. The depth was evaluated for the velocity $v_m = 12$ cm/ns and the position is the nearest point of the cavity to the profile (without migration).

MEASUREMENTS BEHIND TRHLOVCA CAVE TO THE SW

On the course of two forest roads and one hunting foot-path to the south and west of Trhlovca we measured 12 profiles (P12 – P24) of the length between 31 and 408 m (Fig. 9 and Tab. 1).

We found and interpreted cavities, which are marked on Fig. 10 and listed in Tab. 2.

The cavity A – NW from Pretnerjeva Dvorana.

The cavity A was found on the profile P1 (Fig. 3). A relatively large cavity (20 m wide) was found at several levels between 40 m and 60 m below the surface at the position of 45 – 70 m. This depth corresponds to the bottom of Pretnerjeva Dvorana, which means that there should be inflow or outflow corridor to/from old active Divaška Jama.

The cavity B – NW from Žibernova Dvorana

The similar large cavity was found on the profile P4_900 at the depth between 60 and 90 m below the surface at the position of 190 – 220 m (Fig. 2). Some relatively small parts of this cavity are free of sediments, indicated by strong reflections, but the total height of the cavity should be at least 20 m (the difference between reflection depths from the ceiling and the bottom). It should be part of Divaška Jama.

The cavity C – S of the known end of Divaška Jama

Profile P6 crossed the large cavities at the depth of 110 – 130 m below the surface at the positions of 70 – 90 m (Fig. 6 – D6). Below the same profile P6 there are several cavities at the depth of the end of Divaška Jama or cave Trhlovca, i.e., 25 – 35 m (Fig. 6 – A6, B6 and C6). The same was found at the beginning of profile P4_900. It means that there are two cave levels and it is not clear, which of them was the main outflow from Divaška Jama at the time of active flow through it.

The cavities D - S of the known end of Divaška Jama

Large cavities (D) were found at the depths of 40 – 80 m on profile P16 at position of 90 – 200 m (Fig. 11). The width of these cavities is between 20 and 40 m, which correspond to the diameters and position of Divaška Jama. We suppose that these cavities represent an unknown extension of Divaška Jama and the main corridors went through the cavity F, which is near Trhlovca (see next paragraph).

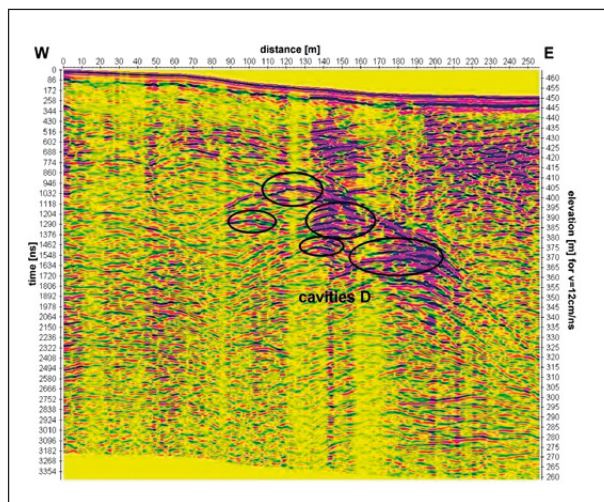


Fig. 11: GPR profile P16.

The cavities E - S of the known end of Divaška Jama

The most southern profile P18 detected between positions of 30 and 150 several cavities (most of them with air, which is detectable by the sequence blue-red-blue

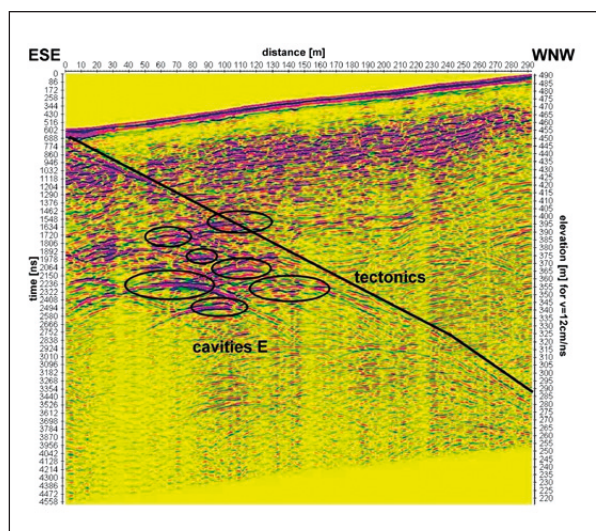


Fig. 12: GPR profile P18.

on radarograms as the wave is travelling from limestone to air, than to sediments and back to limestone) at the depths of 60 – 110 m. All of them are tied to the presumed fault zone (see Fig. 23), which divides the massif into two different parts. The eastern part (left on Fig. 12) is full of caves and cavities and the western part (right on Fig. 12) is practically without karst phenomena. We think that these cavities are part of Divaška Jama because of the same depth and diameters.

The cavities F – above the Trhlovca cave

Several cavities F were found at the profile P12 at depths from 15 m to 60 m. The profile P12 passed above Trhlovca at the position of 160 – 210 m (Fig. 13). Many of detected cavities are known at the depth of 40 m, but the caves deeper than 60 m below the surface are not known yet. The cavity at the depth of 40 – 50 m at the position of 70 – 105 m belongs to group D. It should be a part of Divaška Jama.

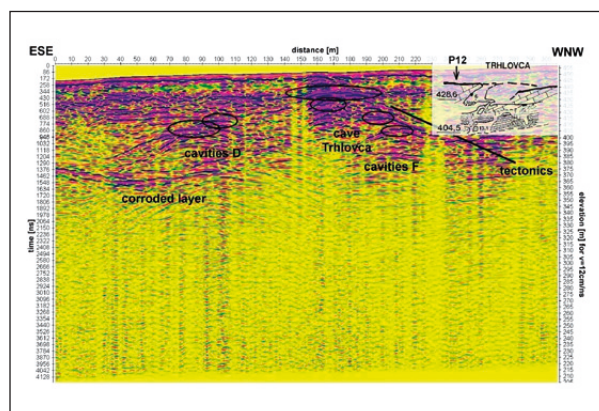


Fig. 13: GPR profile P12 and cross-section of cave Trhlovca by Gospodarič (1985).

The cavities G – W of the Trhlovca cave

Both profiles P13 and P15 (Figs. 14 and 15) show an important cavity of large length. It looks like corroded interlayer surface or an overthrust. The slope of this surface is to the south parallel to the layers in the surroundings. This surface continues to the profile P12, where is at the depth of 15 m and is clearly visible in the entrance

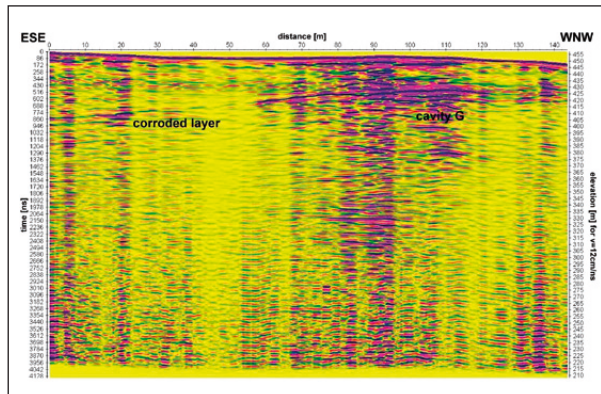


Fig. 14: GPR profile P13.

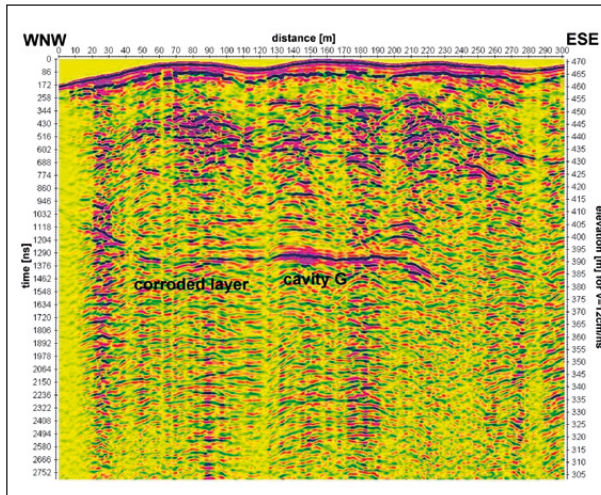


Fig. 15: GPR profile P15

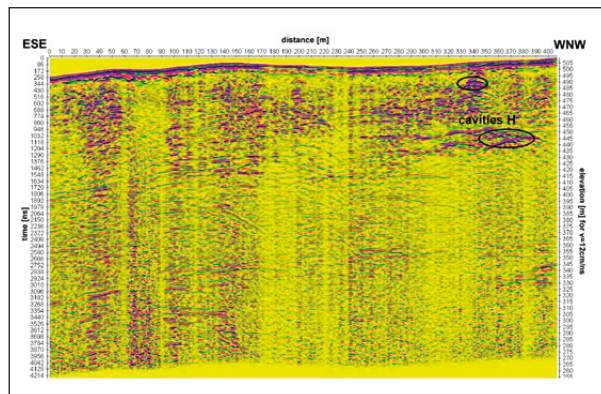


Fig. 16: GPR profile P19

of Trhlovca (the whole upper cave is based on this structural geological layer or thrust fault).

The cavities H

On the profile P19 there are several important cavities only around the position of 340 m at the depths of 15 m, 50 m and 60 m (Fig. 16). They are at the depth of 55 – 60 m (445

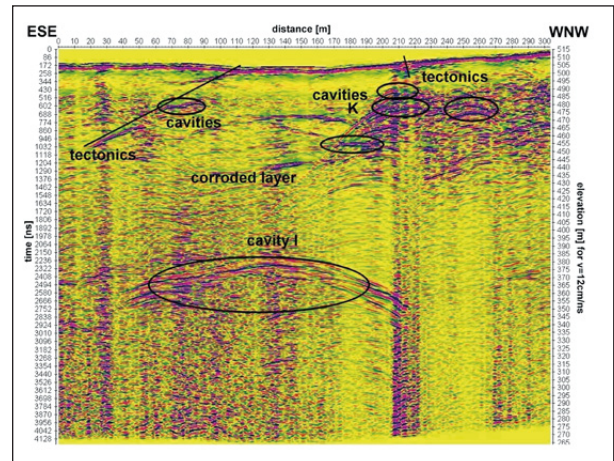


Fig. 17: GPR profile P21.

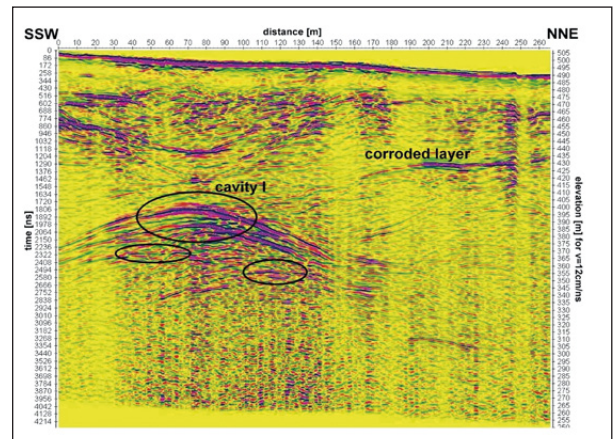


Fig. 18: GPR profile P23.

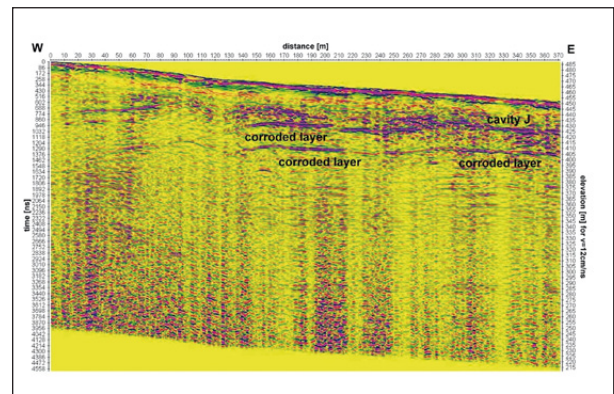


Fig. 19: GPR profile P24.

– 450 m a.s.l.), which is at the same position as the upper cave level in Trhlovca and the surface above Divaška Jama. These caves should not be connected to Divaška Jama.

The cavity I

The largest cavity I at the position of Divaška Jama (370 – 420 m a.s.l.) was found at the depth of 140 m (360 – 375 m a.s.l.) on profile P21 (Fig. 17). The length of the ceiling is approximately 90 m (between positions 60 m and 150 m). Both ends of the cavity I are marked by strong hyperbolas in the same way as on the profiles P2 or P10 for example. There are many other cavities or caves at the positions between 160 – 270 m at the depth of 20 – 55 m. They are connected with the fault zone, which is visible on the surface at the position of 215 m.

The other large karst object at the level of Divaška Jama was found on the profile P23 at the depth of 95 – 120 m below the surface (Fig. 18). It confirms that there is another large corridor besides Divaška Jama at the same level. This corridor was crossed by profiles P21 and P23.

The cavity J

The cavity J was developed on the interlayer geological structure or thrust fault at the end of profile P23 at the depth of 60 m (Fig. 18) and is visible on the profile P24 too (Fig. 19). Probably it is the same structural geological element, which was detected on profiles P12, P13 and P15 (Figs. 13, 14 and 15). This structural geological element must be extraordinarily susceptible to corrosion.

The cavity K

Many other cavities were detected at the end of the profile P21 (between positions 200 m and 260 m) at the depth

of 15 – 40 m around the large tectonic zone of the 10 m width, which was found at the position of 210 – 220 m (Fig. 17). This zone is filled with sediments, especially to the depth of 10 m, which does not allow the radar signal to penetrate large depths (more than 60 m).

The cavity L

The last big karst object – cavity – was found at the end of profile P22 (position 230 – 280 m) at the depth of 130 – 150 m (Fig. 20 – cavity L). Because located at the end of the surveyed area, the orientation of this huge corridor is not known. The level is the same as for Divaška Jama, i.e., 365 – 390 m a.s.l. and the width of cavity (and reflection amplitude) is similar (several dozen of meters).

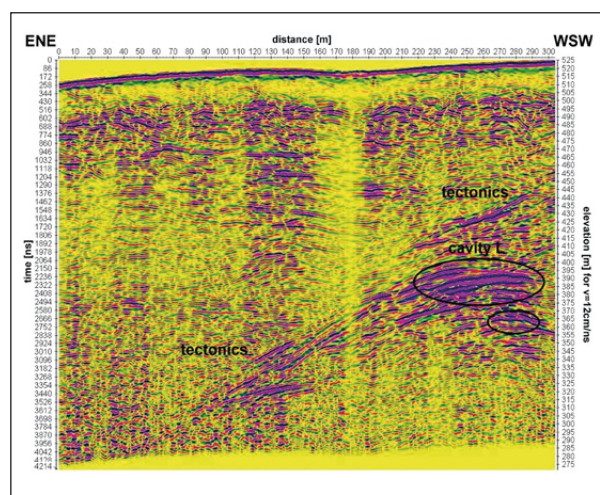


Fig. 20: GPR profile P22.

DISCUSSIONS

PENETRATION DEPTH

The penetration depth depends mostly on the properties of the rocks and, especially, the sedimentary cover, which consists mainly of clay minerals with water, which has high permittivity and high conductivity. In the karst areas, the sedimentary cover is usually very thin and limestone has low conductivity and permittivity, which is advantageous for radar measurements. However, the common GPRs have the penetration depth less than 30 m, even when low frequencies and large antennas are used. Smith & Jol (1995) experimentally estimated that the penetration depth for 25 MHz antenna and Quaternary sedimentary environment (above the level of mineralized water) is between 52 and 57 meters. For 100 MHz

antenna the penetration depth was reduced to 37 m. The results of experimental measurements above Divaška Jama (Gosar 2012) confirmed previous estimations. The problem is in the maximum power output at common GPRs, which does not reach 1MW because semiconductors do not allow switching big currents and short pulses. The “Roteg” GPR uses spark gaps instead of semiconductors, which allow producing pulses of the length of 3-4 ns with the maximal voltage on antenna 20 kV. The power output reaches up to 20 MW in the pulse regime.

During the measurement in the Divaška Jama area we used 3-m antennas with central frequency of 50 MHz and we clearly detected the reflections from the depth of 200 m after data processing (filtering, stacking and aver-

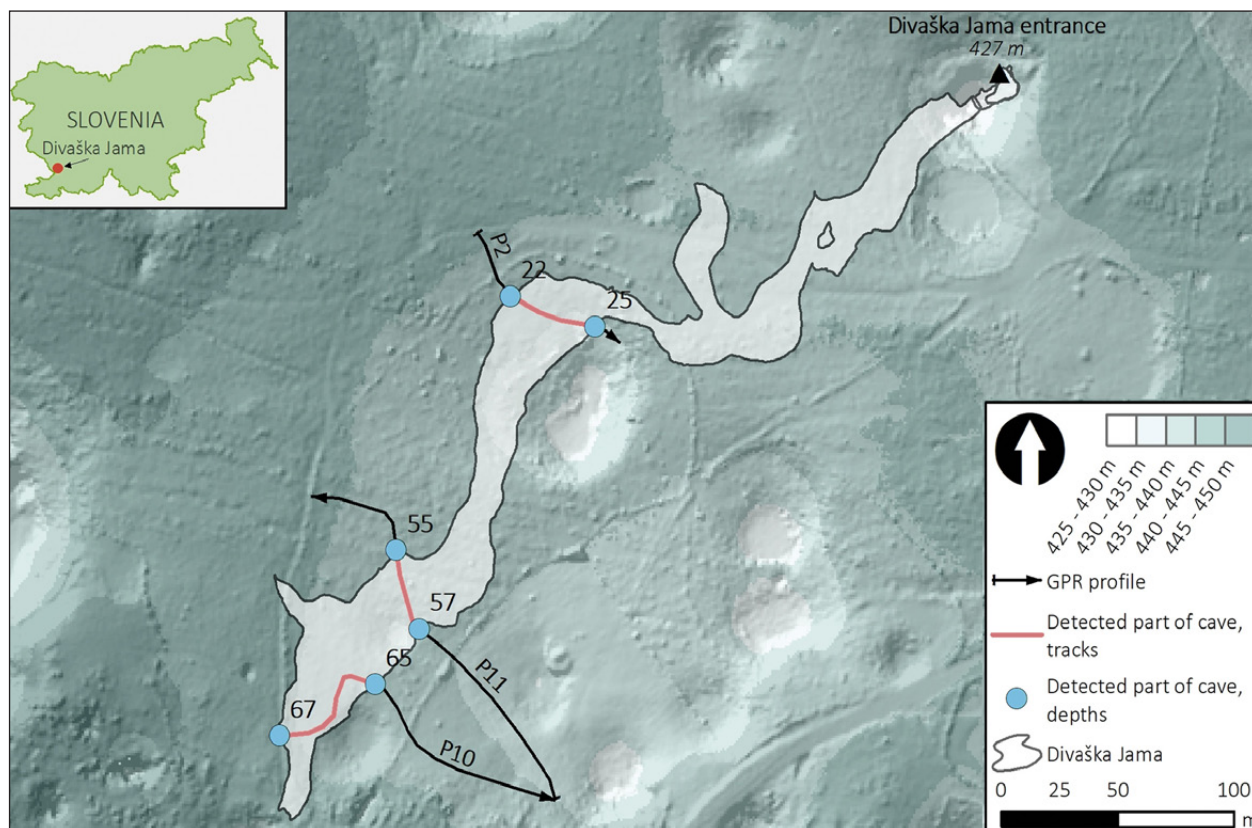


Fig. 21: Contour map of Divaška Jama and detected cavities with the depth.

aging in both x and y axes) (see for example Figs. 20 and 11). The ceiling of Divaška Jama at the depths of 40 – 60 m was detectable right in the field after stacking several samples only (Figs. 4, 7 and 8).

HORIZONTAL AND VERTICAL RESOLUTIONS

The theoretical vertical and horizontal resolutions depend mainly on the length (width) of the pulse and the velocity of EM waves in the rocks. The vertical (range) resolution is not a problem, because, according to Annan (2009), the range resolution r is

$$r = v_m \times \frac{W}{4}, \quad (2)$$

where v_m – velocity of the wave propagation through the material and W is pulse width. The velocity depends only on the permittivity of the material. In our case we used the velocity v_m for wet limestone 12 cm/ns (Cassidy 2009). For 50 MHz antenna and limestone r should be less than 1 m, which allows detecting the typical caves in the area.

The theoretical horizontal (lateral) resolution L between two in-homogeneities depends on the length of

the pulse and the velocity of EM waves in rocks according to the equation (Annan 2009)

$$L = \sqrt{v_m \times W \times \frac{d}{2}}, \quad (3)$$

where d is the depth (distance from the GPR). For 50 MHz antenna, limestone and the depth of 100 m, L should be less than 11 m. For the depth of 50 m, L should be less than 8 m. If we use instead of the wavelength the width of pulse, which is for “Roteg” GPR 3 - 4 ns, the lateral resolution will be 4.25 m only at the depth of 100 m. We can compare the theoretical lateral resolution with the observations of the diameter of the chamber ceilings of Divaška Jama. We measured three profiles above Pretnerjeva Dvorana and Žibernova Dvorana. The first and last deviations of the hyperbola course at the ends of the “flat” part of the reflection mark the beginning and end of the ceiling.

The “beginning” of the cave on the profile P2 is at the position of 33 m at the depth of 22 m (Fig. 4). The “end” of cave can be assumed at the position of 84 m at the depth of 25 m. When we compare these points with

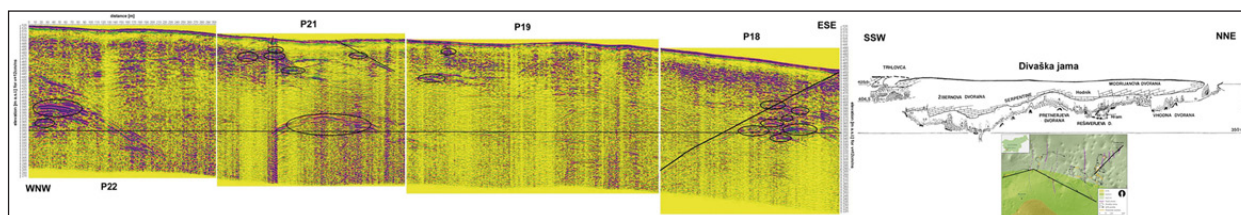


Fig. 22: The mosaic of radarograms of profiles P18 – P22 and the cross-section of Divaška Jama (according to Gospodarič 1985).

the contours of Divaška Jama (Figs. 1, 10 or 21), we can see that lateral error is less than 5 m.

The “beginning” of the cave on the profile P10 is outside the radarogram at the depth of (approximately) 67 m (Fig. 7). The “end” of cave can be assumed at the position of 54 m at the depth of 65 m. When we compare this point with the contours of the Divaška Jama (Figs. 1, 10 or 21), we can see that lateral error is less than 5 m.

The “beginning” of the cave on the profile P11 is at the position of 85 m at the depth of (approximately) 57 m (Fig. 8). The “end” of cave can be assumed at the position of 124 m at the depth of 55 m. When we compare this point with the contours of the Divaška Jama (Figs. 1, 10 or 21), we can see that lateral error is again less than 5 m.

We can compare the GPR method with other geophysical or geological methods:

- integral methods like Very low frequency method (VLF), Resistivity method (RM), Vertical electrical sounding (VES) or Electrical profiling (EP) are relatively easy, but their penetration depth is less than one half of the electrode separation and the vertical and lateral resolutions are relatively low as we suppose the really square errors $E \sim 15\%$ depending on the electrode separation and resistivity contrast (Mariita 1986).
- differential or point methods like Seismic reflection (SR) or drilling are very precise to the depths of several hundred metres, but they are very expensive (more than several thousand times) in comparison with GPR method.

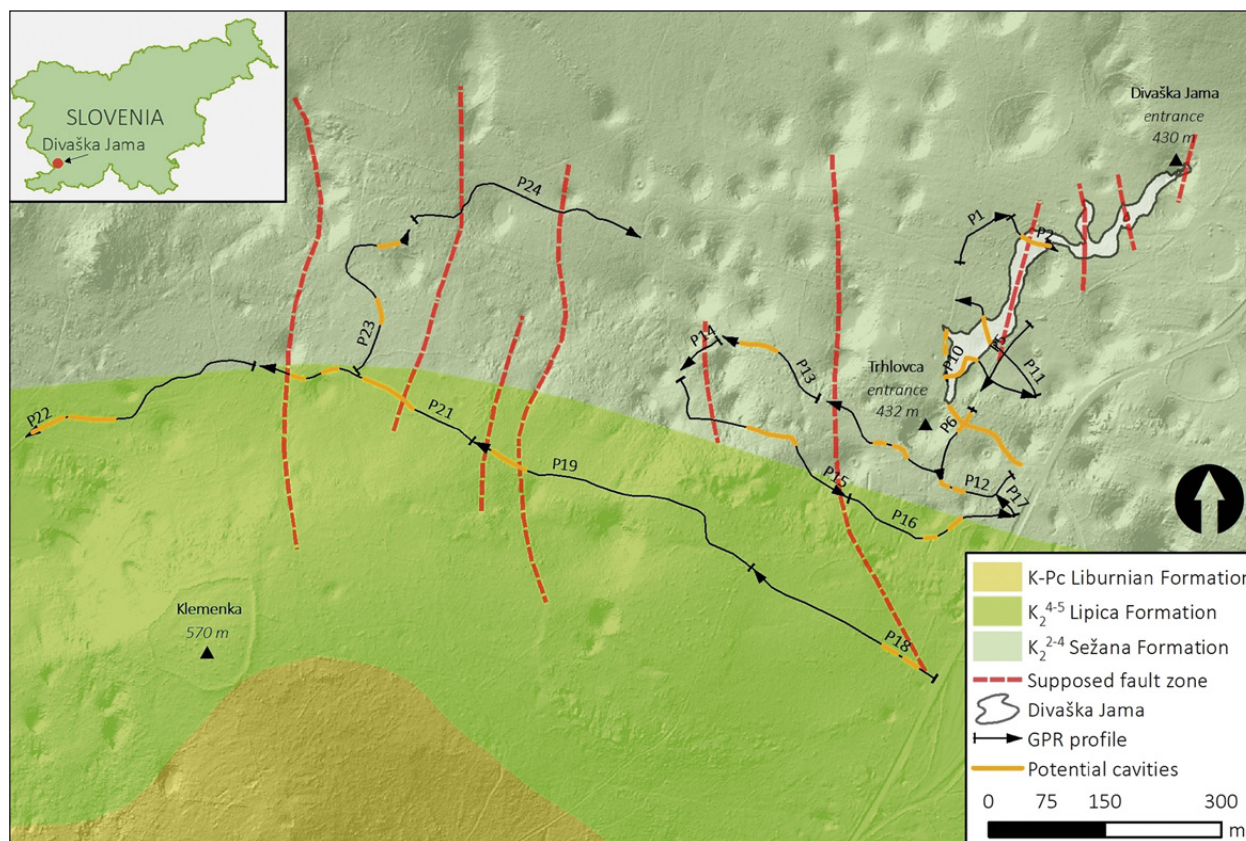


Fig. 23: Lidar map (source ARSO 2017) with GPR “Roteq” profiles (black), tectonics (violet), layers (green and grey) and detected large cavities (orange). Geology after Jurkovšek et al. 1996.

The main limitation factor of using GPR is the penetration depth, which for common kinds of GPRs in common conditions (crystalline rocks and soil cover) reaches only several metres (Bláha *et al.* 1999). Because the new kind of GPR – GPR “Roteg” – has more than 100 times bigger power output and the high sensitivity for low frequencies, especially using 6-m long antennas, the penetration depth is much bigger than for common kinds of GPRs. The positive tested penetration depth of Roteg GPR in the suitable conditions like limestone with small or no cover is much bigger than several hundred metres.

CAVE LEVEL(S)

When we compare the elevations of all recognised caves on the long profile, composed of several radarograms, measured from the road Divača – Lokev to the end of profile P22 W of the Klemenka hill (Fig. 22 or 23) with the vertical cross-section of Divaška Jama, we can see that all big cavities, which were detected below profiles P18, P21 and P22 are almost at the same level of 350 – 400 m a.s.l. (Fig. 22). There is also another group of cavities at the level of 420 – 450 m a.s.l., which corre-

sponds to Trhlovca. Both groups are separated by the gap which extends in the vertical direction, and is visible almost everywhere and probably presents tectonic zone (Fig. 22).

TECTONICS

The main fault and fault zones were recognisable not only on the Lidar map by the surface morphology and structural discontinuities, but many of them were clearly visible on radarograms. The good example of the fault zone is on profile P1 at the position of 77 m (Fig. 3). One of the best expressed faults was detected by three profiles – P18 at the position of 0 m, on profile P15 at the position of 280 m (Fig. 15) and on profile P12 at the position of 300 m. The other important fault zone is clearly visible on the profile P12 at the position of the cave Trhlovca (Fig. 13). Two big faults are visible on profile P21 at the positions 110 m and 212 m (Fig. 17).

Evaluation of the tectonic pattern of the measured area (Fig. 23) showed that courses of the caves follow the prevailing tectonics and fault system pattern not only in Divaška Jama, but everywhere in the study area.

CONCLUSION

At first we tested the penetration depth of novel GPR system above known parts of Divaška Jama and found that ceilings of big chambers are clearly detectable at depths of more than 60 m below the surface.

During the next measurements south and west from Trhlovca cave on an area approximately 1000 x 300 m we found the possible continuation of the Divaška Jama and other large caves at the same level (approximately 360 – 410 m a.s.l.).

The penetration depth of the GPR “Roteg” was sure-

ly more than 200 m using 3-m antennas, 50 MHz frequency and maximal voltage output of 20 kV on transmitting antenna.

We prepared a geological sketch based on Lidar map (ARSO 2017) and we estimated possible tectonic zones, which are close to recognised large cavities and caves at the Divaška Jama level (Fig. 23).

By the use of GPR “Roteg” on karst surface we were able to detect known caves, new unknown caves and tectonic zones up to 200 m under surface.

ACKNOWLEDGEMENTS

Study was financially supported by „Karst Research Programme“ (P6-0119), EPOS IP project (ZRC SAZU), Ing. Rudolf Tengler – RTG and CoalExp Pražmo. We are

greatful to Dr. Trevor Shaw for English text improvement.

REFERENCES

- Allred, B.J., Daniels, J.J. & M.R. Ehsani, 2008: *Handbook of Agricultural Geophysics*.- CRC Press, pp. 410, Boca Raton.
- Annan, A.P., 2009: Electromagnetic Principles of Ground Penetrating Radar.- In: Jol, H.M. (ed.) *Ground Penetrating Radar: Theory and Applications*. Elsevier, pp. 3-40, Amsterdam. DOI: <https://doi.org/10.1016/B978-0-444-53348-7.00001-6>.
- ARSO, 2017: Lidar data fishnet.- [Online] Available from: <http://gis.arso.gov.si/> [Accessed 28th August 2017].
- Bláha, P., Karous, M., Kněz, J. & K. Müller, 1999: Možnosti georadaru v inženýrském průzkumu (Ground penetrating radar and its ability in engineering investigation).- *Geotechnika*, 3/99, 12-15.
- Cassidy, N.J., 2009: Electrical and Magnetic Properties of Rocks, Soils and Fluids.- In: Jol, H.M. (ed.) *Ground Penetrating Radar: Theory and Applications*. Elsevier, pp. 41-72, Amsterdam. DOI: <https://doi.org/10.1016/B978-0-444-53348-7.00002-8>.
- Chamberlain, A.T., Sellers, W., Proctor, C. & R. Coard, 2000: Cave detection in limestone using Ground Penetrating Radar.- *Journal of Archaeological Science*, 27, 10, 957-964. DOI: <https://doi.org/10.1006/jasc.1999.0525>.
- Gosar, A., 2012: Analysis of the capabilities of low frequency ground penetrating radar for cavities detection in rough terrain conditions: The case of Divača cave, Slovenia.- *Acta Carsologica*, 41, 1, 77-88. DOI: <https://doi.org/10.3986/ac.v41i1.49>.
- Gospodarič, R., 1985: On the speleogenesis of Divaška jama and Trhlovca Cave. - *Acta Carsologica*, 23, 5-32.
- Hladík, V. & J. Hruška, 1999: Jak hluboko s georadarem?.- *Geotechnika*, 4/99, 10-11.
- Jurkovšek, B., Toman, M., Ogorelec, B., Šribar, L., Drobne, K., Poljak, M. & L. Šribar, 1996: *Geological Map of the Southern Part of the Trieste-Komen Plateau, Cretaceous and Paleogene Carbonate Rocks, 1:50.000*.- Inštitut za geologijo, geotehniko in geofiziko, pp. 143, Ljubljana.
- Kalenda, P., Tengler, R., Doležal, F.K., Reichel, V. & L. Chlup, 2016: Geofyzikální týden 2015.- *Speleo*, 68, 15-23.
- Kalenda, P. & R. Tengler, 2016: Porovnání výsledků geofyzikálních metod nad Holštejnskou jeskyní.- *Speleofórum* 2016, 35, 31-34.
- Kalenda, P., Tengler, R., Cendelin, R., Slezák, L. & J. Pokorný, 2017a: Georadarová měření nad Pekárnou 2016.- *Speleofórum* 2017, 36, 30-35.
- Kalenda, P., Tengler, R., Blatnik, M. & F. Drole, 2017b: Georadarová měření Postojna 2016.- *Speleofórum* 2017, 36, 87-89.
- Kalenda, P., Tengler, R., Šebela, S., Blatnik, M. & F. Drole, 2018: Field test of the ground penetrating radar (GPR) above karst of Planina cave (Slovenia) for >150 m depth.- *Acta Carsologica*, Submitted.
- Knez, M. & T. Slabe, 2005: Non-destructive georadar researches in the area of road subsidence of motorway near Postojna, classical Karst, Slovenia.- *Geophysical Research Abstracts*, 7.
- Mariita, N.O., 1986: Schlumberger vertical soundings: Techniques and interpretations with examples from Krísvík and Gleradarur, Iceland and Olkaria, Kenya.- [Online] Available from: <https://orkustofnun.is/gogn/unu-gtp-report/UNU-GTP-1986-05.pdf> [Accessed 4th March 2017].
- Pavlič, M.U. & B. Praznik, 2011: Detecting karstic zones during highway construction using ground-penetrating radar.- *Acta Geotech. Slovenica*, 8, 1, 17-27.
- RTG-Tengler, 2013: [Online] Available from: <http://georadar.rtg-tengler.cz> [Accessed 4th June 2017].
- Smith, D.G. & H.M. Jol, 1995: Ground penetrating radar: antenna frequencies and maximum probable depths of penetration in Quaternary sediments.- *Journal of Applied Geophysics*, 33, 1-3, 93-100. DOI: [https://doi.org/10.1016/0926-9851\(95\)90032-2](https://doi.org/10.1016/0926-9851(95)90032-2).
- Tengler, R., Kalenda, P., Doležal, F.K. & L. Chlup, 2016: Testování nového typu georadaru s velkým hloubkovým dosahem.- *Speleofórum* 2016, 35, 35-42.
- van der Kruk, J., Slob, E.C. & J.T. Fokkema, 1999: Background of ground-penetrating radar measurements.- *Geologie en Mijnbouw*, 77, 177-188.